


Last Modified: 9-13-2007		1.6 A
Service Category: Brake	Section: Brake Control/Dynamic Control System	
Model Year: 2008	Model: FJ Cruiser	Doc ID: RM000000WET00NX
Title: BRAKE CONTROL: FRONT SPEED SENSOR: INSTALLATION (2008 FJ Cruiser)		

INSTALLATION

1. INSTALL FRONT SPEED SENSOR

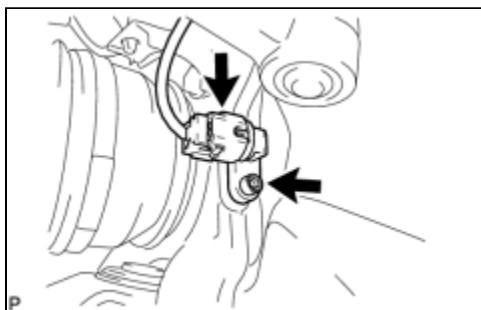

(a) Using a 5 mm hexagon wrench, install the front speed sensor with the bolt.

Torque: 8.3 N·m (85 kgf·cm, 73 in·lbf)

NOTICE:

Make sure that the sensor tip is clean.

(b) Connect the skid control sensor wire.

2. INSTALL FRONT WHEEL

Torque: 112 N·m (1,137 kgf·cm, 82 ft·lbf)

3. CONNECT CABLE TO NEGATIVE BATTERY TERMINAL

Torque: 3.9 N·m (40 kgf·cm, 35 in·lbf)

4. CHECK VSC SENSOR SIGNAL

INFO

